

DATA SHEET - HL2024 Cradle

Pressure independent modular flow controller. Flow control with quick and easy maintenance.



Figure number: 1350

Product overview

Optimal flow control and quick maintenance

The HL2024 Cradle houses a HL2024 Cartridge: a modular system that contains up to three pressure independent HL2024 Flow Controller(s) (HL2024 inserts). This product is designed to allow for very quick and easy maintenance while ensuring a constant flow, optimal user comfort, savings and system stabilisation. The HL2024 all-in-one.

Certified constant flow

HL2024 products are pressure independent and as such provide a constant flow as certified by Kiwa, Netherlands (BRL-K635). The products meet the requirements for Kiwa Water Mark and primary European drinking water standards. All HL2024 products contain one or more integrated HL2024 Flow Controller(s). HL2024 is uniquely certified for pressure independence and long term operation.

Application

In the piping.

Key properties

- Optimal flow control as a result of constant flow
- Customisable flow rate
- Quick and easy maintenance due to removable Cartridge system
- Definition of peak volume demand
- Water- and energy savings
- System stabilisation
- System pressure loss reduction
- Sealable Cartridge system



Top left: HL2024 Cradle

Bottom right: HL2024 Cradle - dimensions (in mm)

Specifications

Mounting: into the piping

Connection inlet: G 1/2" (BSPP) male for 15 mm compression ring

Connection outlet: G 1/2" (BSPP) male for 15 mm compression ring

Total length (including thread): 114.0 mm

Thread length male: 12.0 mm

Diameter: 60.3 mm

Weight: 1.193 g

Housing material: brass (4MS), stainless steel, bronze

Finish outside: none

Finish water contact area: n/a

Max. Particle size: 400 µm

Max. Operating temperature: 90 °C *

Flow rate versions (combination of HL2024 inserts):


5.0 | 7.8 | 10.0 | 12.8 | 15.0 | 15.6 | 17.8 | 20.6 | 23.4 l/min

150/200-1.000 kPa/dyn (depends on combination of HL2024 inserts)

Constant flow: pressure independent

Flow deviation within mentioned dynamic pressure range: max. 2%. **

The graph shows the constant flow performance of HL2024 products.

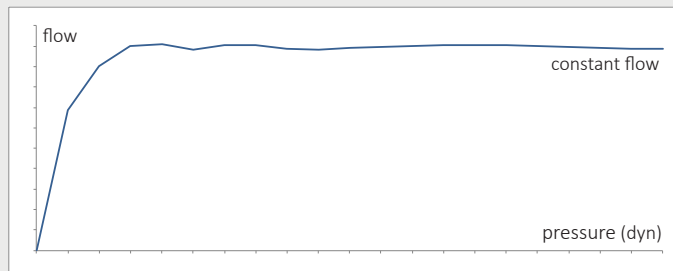

* In case of permanent or semi-permanent use at 500 kPa/dyn or more combine with 60 °C or more, please contact us at comercial@cenergist.com

** Counter-pressure in the system might somewhat influence the flow rate.

